


STNP | POUR-IN-PLACE NOSING

Patented, factory-applied Construction Cover

(U.S. Patent 8850757) protects the stair nose from concrete splatters, paint drips, etc. When the job is done, unsnap the cover and recycle.

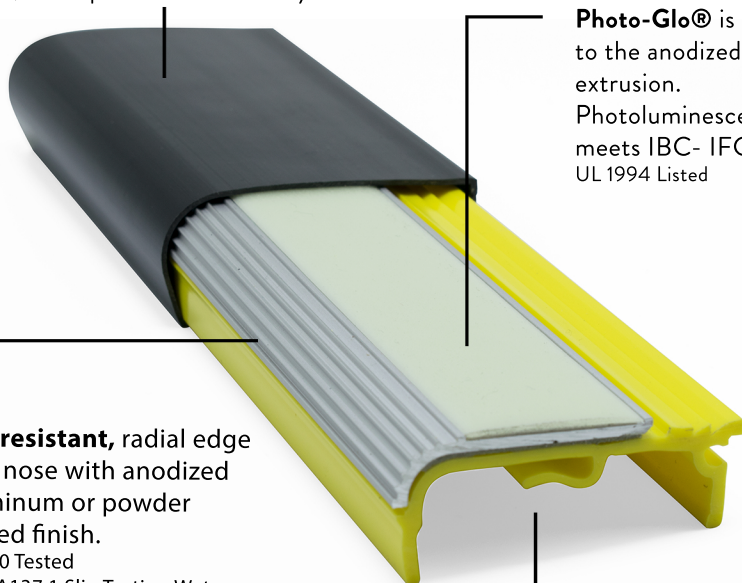

Slip resistant, radial edge stair nose with anodized aluminum or powder coated finish.

UL 410 Tested
ANSI A137.1 Slip Testing Wet
DCOF of .42, Dry.50
U.S. Patent D621961. Other patents pending.

Photo-Glo® is laminated to the anodized aluminum extrusion. Photoluminescent strip meets IBC- IFC codes. UL 1994 Listed

Non-conductive isolator embeds in the wet concrete and remains firmly anchored.

Four piece design: 2" non-conductive pvc isolator, replaceable anodized nosing, replaceable 1" Photo-Glo® strip, patented construction cover. Assembly clips on prior to concrete pour. Up to 12', to the nearest 1/16".



Code Compliant in all 50 states and Canada:

Exceeds ASTM E2072 glow requirements
Code compliant: IBC / IFC / NFPA 101 / OSHA / ADA

UL 410 & UL 1994 listed 

Warranty Information

Stair Nosing – **5 year warranty**
Photo-Glo – **25 year warranty**

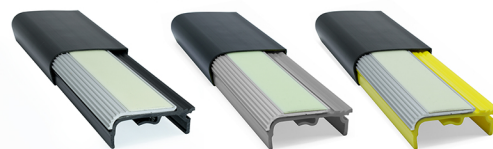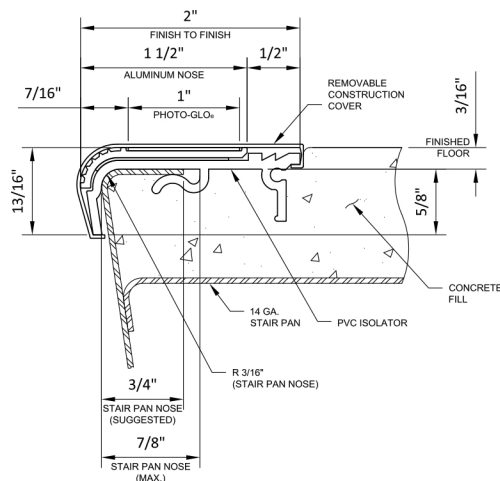


OPTIONS:

- Black, Grey or Yellow isolator color
- Black or Yellow powder coated aluminum
- Black or Yellow traction strip, when pl is not needed



- Patented construction cover protects nosing from concrete splatters, paint drips and foot traffic.
- When the job is ready to turn over, snap off Construction Cover to reveal clean stair nosing.
- A better result by design.

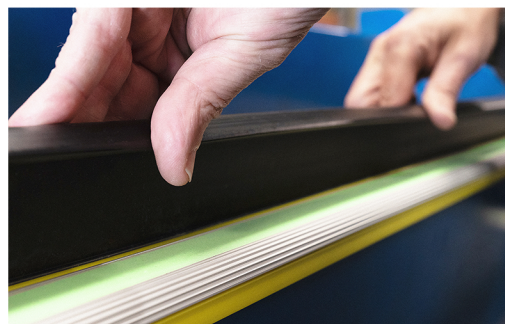

Safe-T-Nose®
LEAVE NO DOUBT • THIS WAY OUT • EXIT SAFELY

MADE IN THE
USA

WWW.SAFETNOSE.COM • 855-723-6673