
EUL50 & EUL502 | EXIT SIGNS

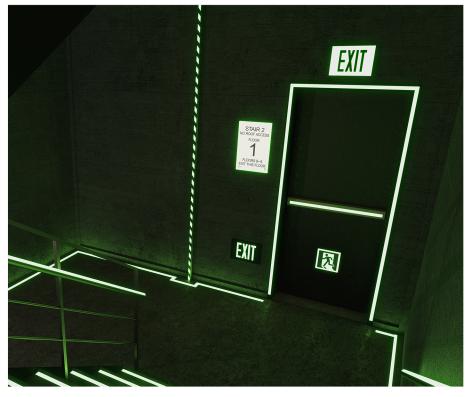

Photoluminescent Exit Signs Cannot Fail!

They require no electricity, eliminating the need for battery backup and light bulb testing: Attach above the door or directly on the door.

- Single and double sided available
- 50' Viewing Distance photoluminescent letters
- 90-minute emergency iullumination
- 16" x 9" Dimension
- Optional mounting brackets available
- Perfect for low level exit signs, now required in R-1 occupancy
- <u>No</u> wiring
- <u>No</u> maintenance
- <u>No</u> energy use
- <u>No</u> failure

Code Compliant in all 50 states: Code compliant: ICC/IBC/IFC/NFPA 101/OSHA

UL 924 listed

CUL)US

10-Year Warranty






Single or double sided





625



SURFACE MOUNT UPPER OR LOWER





FLAG MOUNT





Options:

CEILING MOUNT



- Available in silver, green, red and black
- Mounting Brackets:

